

MICHELIN® Pro Series™ Beam Installation

NOTE: When replacing wiper blade place a towel or equivalent under the wiper arm. This will protect the windshield if you accidentally allow the wiper arm to fall.

Connector A (Pre-installed)

Hook 1/2" / 9mm x 3mm
Hook 3/4" / 9mm x 4mm

① ② ③ ④ ⑤ "Click" "Click"

NOTE: Door will not close fully until arm is locked in place!

Connector B (See side 2 for installation)

Side Lock 1

① ② ③ "Click"

Connector B (See side 2 for installation)

Side Lock 2

① ② ③ ④ "Click"

Connector B (See side 2 for installation)



Top Lock

① ② ③ "Click"


See side 2 for MICHELIN® Pro Series™ Beam Connector "A" Removal and Connector "B" Installation

MICHELIN® Pro Series™ Beam Connector “A” Removal and Connector “B” Installation


Connector A Removal

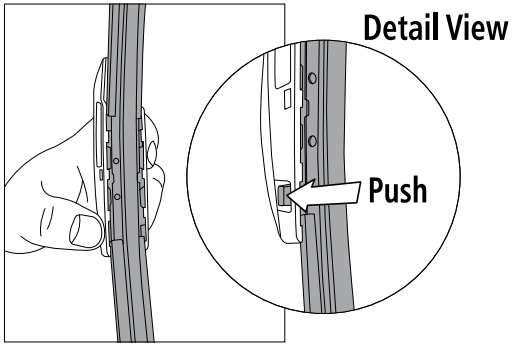

1. Push down tab.





2. Pull wiper blade down and away.




3. Disengage pre-installed connector.


Connector B Installation

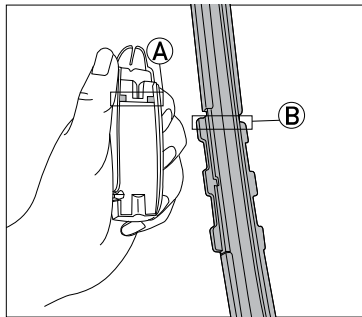

1. Locate alternate connector and slide down B under A.

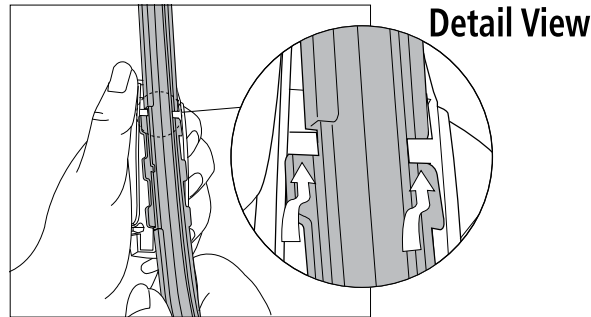

2. Slide down wiper blade in position (as shown) making sure all tabs are engaged.

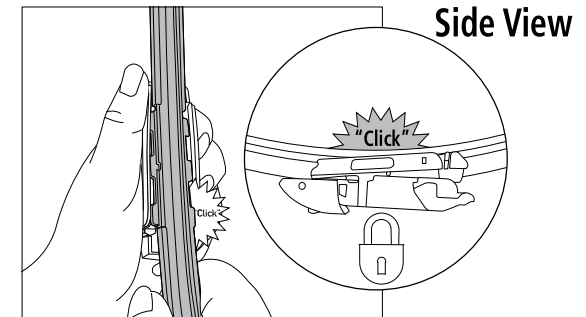

3. Push connector down on wiper until you hear a “Click”.

Visit www.michelinwipers.com for step-by-step installation and removal videos

GUARANTEED SATISFACTION: If you are not completely satisfied with the quality and performance of your Michelin Wiper Blades call 1-866-499-0572 and tell us why. Send your original receipt to Pylon Manufacturing Corporation and we will send you a set of comparable replacement blades free of charge. Replacements are limited to a period of one year after the date of purchase.

MICHELIN and/or the Michelin Man Device and/or BIBENDUM are trademark(s) owned by, and used with the permission of, the Michelin Group. Manufactured and distributed under license by Pylon Manufacturing. ©2019 Pylon Manufacturing Corp. All rights reserved.